


Technical Data Sheet

RSKCuIv4

| | |
|--------------------------|---|
| Description: | copper + acrylic coated woven PES fabric |
| Type of weave: | parachute silk |
| Roll width: | 132 cm ±2 cm |
| Surface resistivity: | Max average 0,05 Ohm/square |
| Shielding effectiveness: | 75-90 dB from 30 MHz to 1.5 GHz 90-95 dB from 1.5 GHz to 3.0 GHz |
| Purpose: | conductive fabric for general purpose |
| Temperature range: | -30 °C to 90 °C |
| Product applications: | base material for EMI/RFI gaskets, garments |

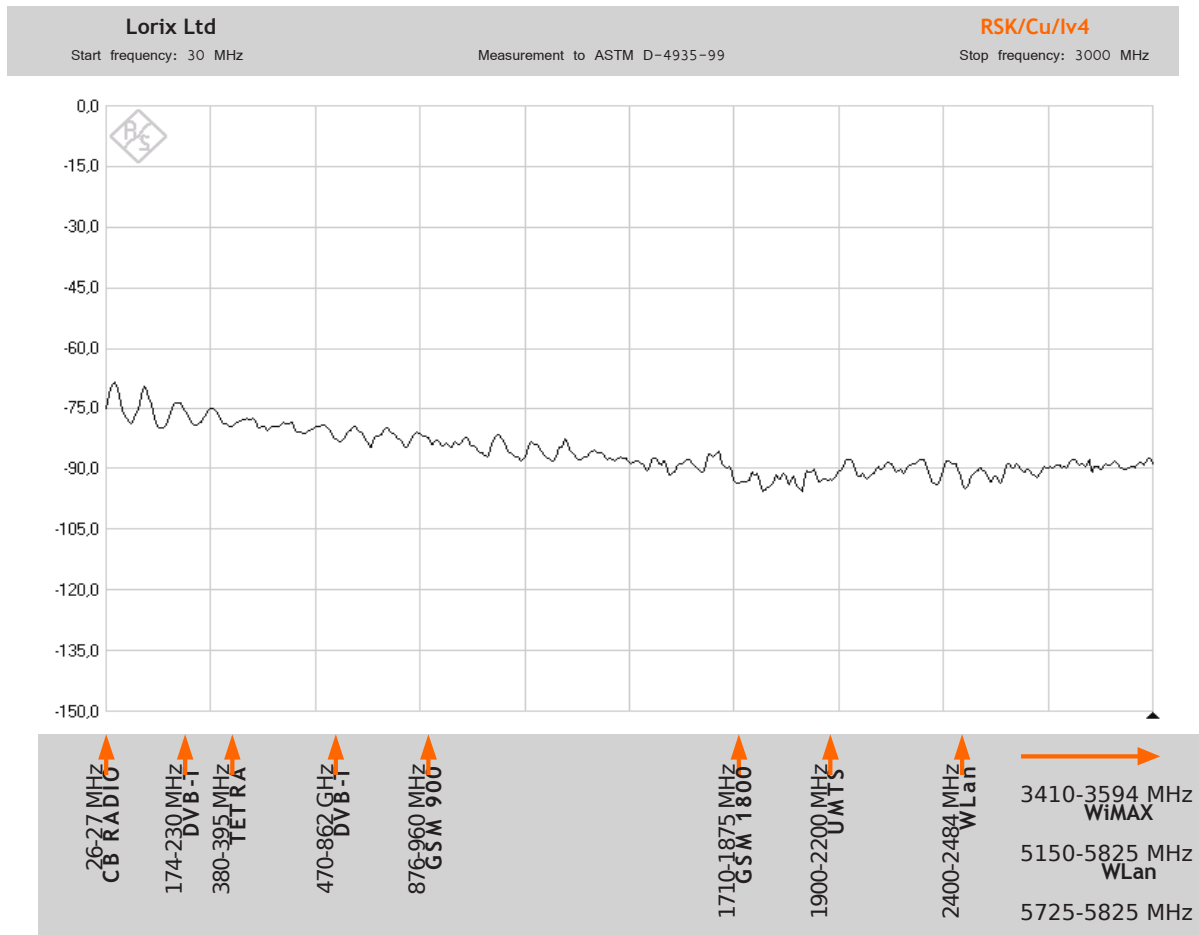

Protected by LORIX Ltd. H-1112 Budapest Oltvány árok 14.
Hungary
Tel.: (+36) 1 246 6921
Fax.: (+36) 1 246 0475



lorix@lorix.hu www.lorix.hu