


# Technical Data Sheet

## PWKCu+Ni

Description:	copper + nickel plated woven fabric
Type of weave:	Plain weave polyester fabric
Roll width:	132 cm ±2 cm
Surface resistivity:	Max average 0,02 Ohm/square
Shielding effectiveness:	75-95 dB from 30 MHz to 1.5 GHz 95-105 dB from 1.5 GHz to 3.0 GHz
Temperature range:	-30 °C to 90 °C
Product applications:	conductive fabric for general purpose base material for EMI/RFI gaskets, garments

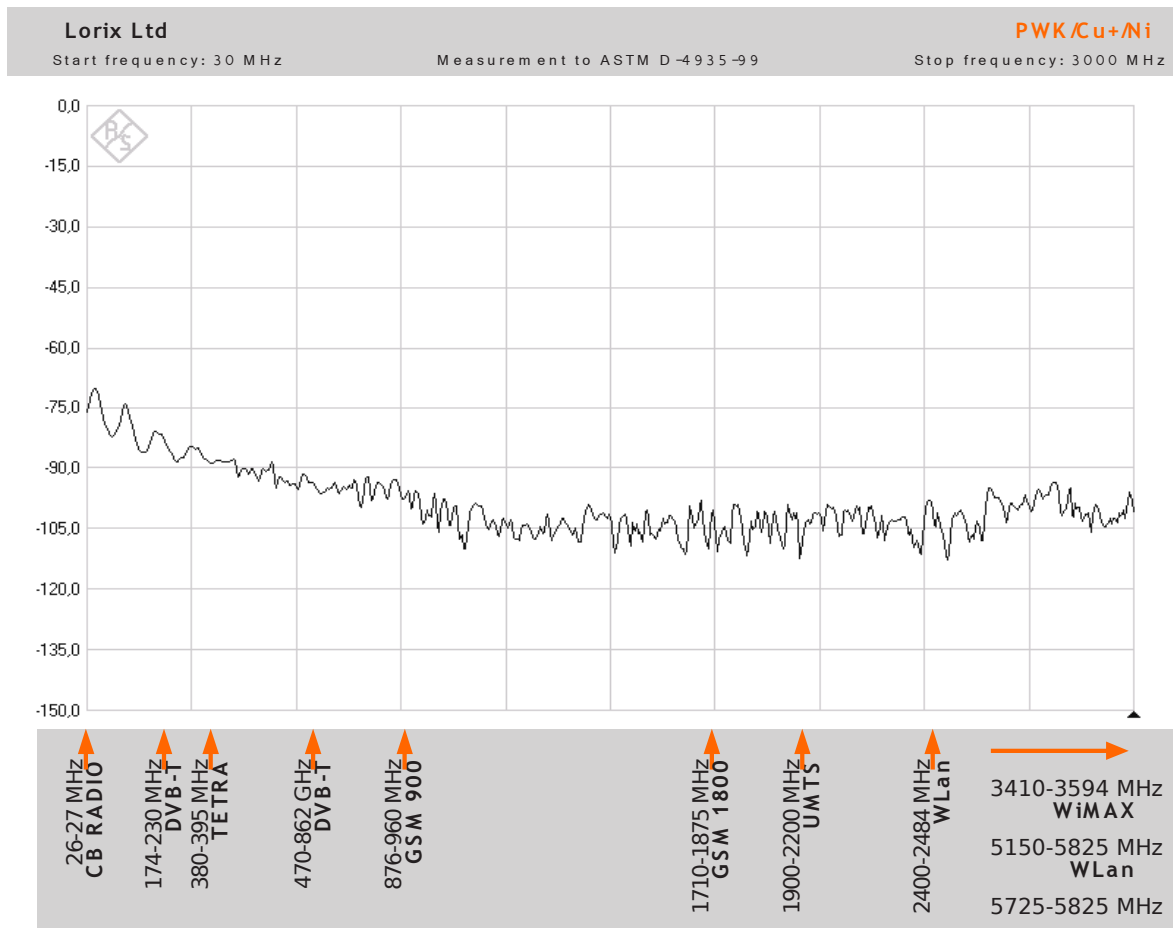

Protected by LORIX Ltd. H-1112 Budapest Oltvány árok 14.  
Hungary  
Tel.: (+36) 1 246 6921  
Fax.: (+36) 1 246 0475



[lorix@lorix.hu](mailto:lorix@lorix.hu) [www.lorix.hu](http://www.lorix.hu)